

OdorCap Use Instructions

Where to Use:

1. OdorCap is a media blend with a primary use to reduce odors that are released out of sewer and grease interceptor manhole ports.

Supplies Needed:

1. **OdorCap** 1ea/30-Gallon Drum of Media - Part Number: JCOC130GD
2. Manhole insert with holes and media screen

Prepare and Placement of Manhole Insert:

1. Obtain properly sized manhole insert.
2. Drill 10ea – ¼" diameter holes into the bottom of the insert.
3. Secure a fine-mesh metal screen to the insert ensuring that the holes are all contained within the screen.
4. Place insert into manhole and add 2.5 gallons of OdorCap to the insert.

Maintenance:

1. Replace OdorCap media every 90 days or more often depending on results and the amount of odors emitting from the manhole. If media turns brown, it needs to be replaced.
2. If fine-mesh screen is damaged, replace.
3. Ensure that pre-drilled holes in insert are free and clear of any obstructions before replacing media.

Appearance After Use:

The pictures below show the appearance of the media for a manhole insert at installation and 1 month after installation.


*Manhole insert
at installation*



*Manhole insert
after absorbing
H₂S odors (100ppm+)
for 30 days*



Technology:

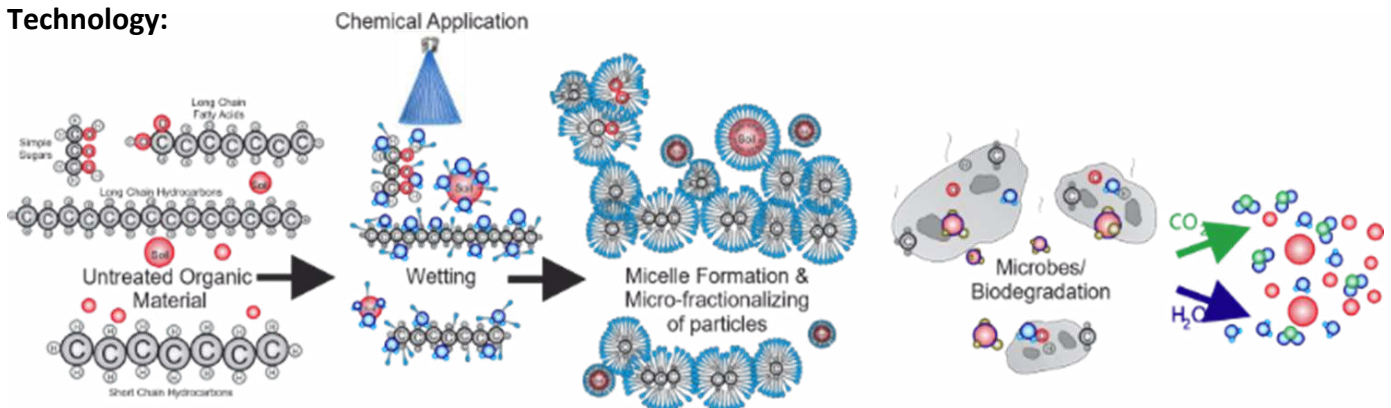

A New Era of Scientific Solutions for Your Peace of Mind

To know more about our technologies or obtain more information on these products, please visit us at www.NewEraSOS.com, call us at 1-888-637-6760 or send us an email at customerservice@NewEraSOS.com